

CATALOGUE 2024

LADDERS | SCAFFOLDING | LADDER HOIST

DR A BEST



PRODUCT COMPARISON

ALD	4
DD	4
DW3	5
ARD	6
HECTOR / IKAR	7

LADDER HOIST

	8-11
--	------

HOME

ALD 125KG	14
ALDP 125KG	15
STD 125KG	16
DD 125KG	17
MINIFERO 125KG	18
KITCHEN STEPS 150KG	19
ST TW 150KG	20
DW2 HOME 150KG	21
DW3 HOME 150KG	22
DU HOME 150KG	23
ARD HOME 150KG	24

PRO

ALD 150KG	26
ALDP 150KG	27
ALDP+P 150KG	28
DD 150KG	29
MALARSKA-DREW 150KG	30
DP PRO 150 KG	31
DW2 PRO 150 KG	32
DW3 PRO 150 KG	33
DU PRO 150 KG	34
ARD PRO 150 KG	35
IKAR 150 KG	36
HECTOR 200 KG	37
HECTOR BASIC 150 KG	38

MAX

DW3 MAX 150 KG	40-43
----------------	-------

LADDER ACCESSORIES

	45-50
--	-------

FIRE ESCAPE LADDERS

	51-52
--	-------

CHOOSE THE BEST LADDER!

4

PARAMETERS	HOME	PRO
------------	------	-----

ALD



LOAD CAPACITY	125 KG	150 KG
PROFILE THICKNESS	0,8mm	1,2mm
USE		
QUALITY / CERTIFICATE	QUALITY APPROVED BY THE MANUFACTURER	

p. 14

p. 26

DD


















LOAD CAPACITY	125 KG	150 KG
PROFILE THICKNESS	0,8mm	1,2mm
USE		
QUALITY / CERTIFICATE	QUALITY APPROVED BY THE MANUFACTURER	








p. 17

p. 29

3-ELEMENT LADDER - WHICH ONE TO CHOOSE?


PARAMETERS	HOME	PRO	MAX
			
DW 3			
MODELS	6-11	6-16	7, 9, 11, 13
RUNG PROFILE	25x25 mm	28x28 mm	28x28 mm
USE			
DISTANCE BETWEEN RUNGS	265 mm	265 mm	290 mm
FUNCTION ON THE STAIRS			
FEET	STANDARD BLACK 	STANDARD YELLOW 	MOVABLE DOUBLE-SIDED 
STABILIZER LENGTH	[mm] 675 860 980 <small>dla modelu 6,7 dla modelu 8,9,10 dla modelu 11</small>	[mm] 700 825 900 <small>dla modelu 6 dla modelu 7,8 dla modelu 9</small> [mm] 974 1100 1200 <small>dla modelu 10 dla modelu 11,12 dla modelu 13-16</small>	[mm] 900 1100 1200 <small>dla modelu 7 dla modelu 9 dla modelu 11,13</small>
QUALITY / CERTIFICATE			
ADDITIONAL ITEMS	STABILIZER	STABILIZER	RUBBER WHEELS ADDITIONAL STABILIZER (FOR MODELS: 3x11 and 3x13) STEEL BRACKET

LADDER SCAFFOLDING - MODELS

SCAFFOLDING	ARD BASIC	ARD PRO
 <p>3w!</p>		
PLATFORM DIMENSIONS	1,14 x 0,34 m	1,50 x 0,46 m
LADDER WIDTH	0,46 m	0,58 m
RUNGS	25 x 25 mm	28 x 28 mm
USE	 	 
QUALITY	<div style="border: 1px solid black; padding: 5px; text-align: center;"> CERTIFICATE EN 131 NON PROFESSIONAL USE </div>	<div style="border: 1px solid black; padding: 5px; text-align: center;"> CERTIFICATE EN 131 PROFESSIONAL USE </div>

WHICH SCAFFOLDING TO CHOOSE?

SCAFFOLDING	HECTOR BASIC	HECTOR	IKAR
-------------	---------------------	---------------	-------------



WORKING PLATFORM	1,34x0,60m	1,34x0,60m +side panels	1,30x0,60m
LOAD CAPACITY	150 KG	200 KG	150 KG
QUALITY	CERTIFICATE EN 131 PROFESSIONAL USE	CERTIFICATE EN 1004 PROFESSIONAL USE	CERTIFICATE EN 131 PROFESSIONAL USE
STABILIZER LENGTH	1,30 m	1,30 m	1,10 m
MAXIMUM WORKING HEIGHT	4,00 m	4,73 m	4,00 m

p. 38

p. 37

p. 36

LADDER HOIST

NEW

8




LADDER HOIST



- Lightweight aluminum construction that will be perfect for daily support in construction and renovation work
- Easy to assemble and disassemble, and when folded, the compact form will allow for convenient transportation and storage
- All components have a total weight of 90 kg
- Lifting speed as high as 8 meters per minute
- Lifting capacity up to 125 kilograms
- Large transport cart STANDARD or for photovoltaics, which is additionally covered with waterproof non-slip plywood
- Possibility of disassembling side covers in the standard cart enables transportation of materials of different dimensions
- Drabest roofing elevator has CE declaration, all necessary approvals, and meets health and safety standards
- It will provide you and your employees with many years of safe and comfortable work

LADDER HOIST			
		A [m] HEIGHT TO THE ROOF	6,50
		B [m] LADDER LENGTH	12,5
		C [m] LADDER WIDTH	0,63
		E [m] STABILIZER	1,12
		G [m] BRACKET LENGTH	1,90÷3,30
		WEIGHT [kg] WEIGHT	90
		PACKAGING DIMENSIONS	2,00 x 0,80 x 1,50

■ STANDARD trolley WT-AL-M-12

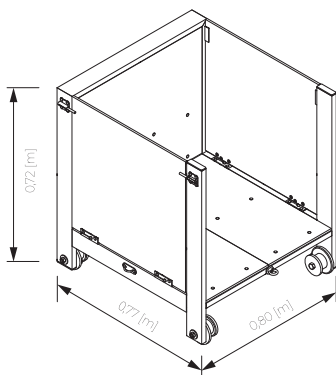


■ trolley for PV MODULES WT-AL-M-12-BW

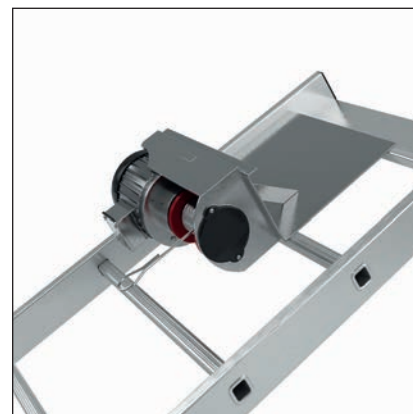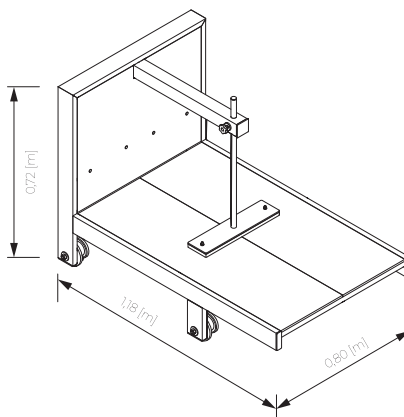

LADDER HOIST

MEASUREMENTS & WEIGHTS MAY VARY ±5%

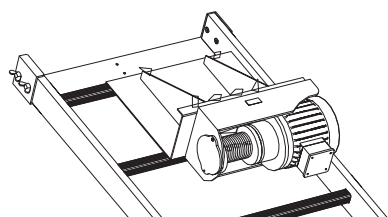

MINIMUM ENGINE POWER	1050 W
SUPPLY VOLTAGE	230 V
MAXIMUM LOAD	125 [kg]
LINE LENGTH	12[m]
LIFTING SPEED	8 [m/min.]
ELECTRIC MOTOR INGRESS PROTECTION RATING	IP 54

LADDER HOIST

NEW

10






HOME




HOME product
range
approved for
household use

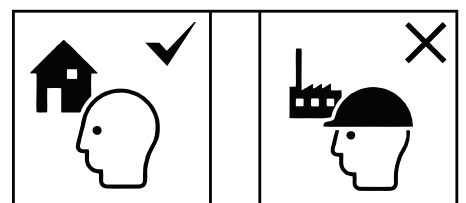

HOME

FOR HOME USE



■ INCLUDED



■ ALD 4 125 KG



■ ALD 6, 7, 8 125 KG



14

ALD 125 KG + HOOK

ALUMINUM HOUSEHOLD LADDER WITH HOOK
SINGLE-SIDED ACCESS

- Dedicated for work in **households**
- Sturdy ladder construction made of durable aluminum
- Safe 0,60 [m] headband **with a hook** for a bucket
- Steel working platform 0,25 x 0,26 [m] with a specially embossed surface guarantees safe work
- Additional securing belts on ALD 6, 7, 8 models
- Notched steps riveted and secured with black plastic covers
- Special non-slip feet ensure the highest safety standard and protect the floor against scratches
- Load capacity **max. 125 kg**

ALD 125 KG		NUMBER OF STEPS						
		3	4	5	6	7	8	
	A [m] WORKING HEIGHT	2,54	2,75	2,97	3,19	3,40	3,62	
	B [m] PLATFORM HEIGHT	0,54	0,75	0,97	1,19	1,40	1,62	
	C [m] LADDER WIDTH	0,40	0,43	0,45	0,48	0,50	0,52	
	D [m] LADDER LENGTH	1,21	1,45	1,68	1,91	2,15	2,37	
	G [m] LADDER THICKNESS	0,12	0,12	0,12	0,12	0,12	0,12	
	WEIGHT [kg] WEIGHT	2,50	2,90	3,60	4,20	4,70	5,60	
	DXCXG [m] PACKAGE	1,21x0,4x0,12	1,45x0,43x0,12	1,68x0,45x0,12	1,91x0,45x0,12	2,15x0,50x0,12	2,37x0,52x0,12	



ALDP 125 KG

ALUMINUM HOUSEHOLD LADDER WITH TOOL SHELF
SINGLE-SIDED ACCESS

- Dedicated for work in households
- Sturdy ladder construction made of durable aluminum
- Safe 0,60 [m] headband with tool shelf
- Steel working platform 0,25 x 0,26 [m] with a specially embossed surface guarantees safe work
- Additional securing belts on ALDP 6, 7, 8 models
- Notched steps riveted and secured with black plastic covers
- Special non-slip feet ensure the highest safety standard and protect the floor against scratches
- Load capacity max. 125 kg

ALDP 125 KG		NUMBER OF STEPS		3	4	5	6	7	8
	A [m]	WORKING HEIGHT		2,54	2,75	2,97	3,19	3,40	3,62
	B [m]	PLATFORM HEIGHT		0,54	0,75	0,97	1,19	1,40	1,62
	C [m]	LADDER WIDTH		0,40	0,43	0,45	0,48	0,50	0,52
	D [m]	LADDER LENGTH		1,21	1,45	1,68	1,91	2,15	2,37
	G [m]	LADDER THICKNESS		0,12	0,12	0,12	0,12	0,12	0,12
	WEIGHT [kg]	WEIGHT		2,50	2,90	3,60	4,20	4,70	5,60
	DxCxG [m]	PACKAGE		1,21x0,4x0,12	1,45x0,43x0,12	1,68x0,45x0,12	1,91x0,45x0,12	2,15x0,50x0,12	2,37x0,52x0,12

HOME

FOR HOME USE



16



STD 125 KG

STEEL HOUSEHOLD LADDER
SINGLE SIDED ACCESS

- Dedicated for work in **households**
- Sturdy ladder construction made of powder-coated steel
- Models STD 3-8 powder coated - gray colour
- Models STD 4-6 powder coated - black
- Safe 0,60 [m] headband
- Steel working platform 0,25 x 0,26 [m] with a specially embossed surface guarantees safe work
- Notched and welded steps!
- Special plastic feet ensure work stability
- Load capacity **max. 125 kg**

STD 125 KG		NUMBER OF STEPS	3	4	5	6	7	8	
<p>MEASUREMENTS & WEIGHTS MAY VARY ±5%</p>	A [m]	WORKING HEIGHT	2,57	2,75	3,00	3,20	3,46	3,68	
	B [m]	PLATFORM HEIGHT	0,57	0,75	1,00	1,20	1,46	1,68	
	C [m]	LADDER WIDTH	0,40	0,43	0,46	0,49	0,52	0,55	
	D [m]	LADDER LENGTH	1,25	1,49	1,73	1,97	2,19	2,43	
	G [m]	LADDER THICKNESS	0,08	0,08	0,08	0,08	0,08	0,08	
	WEIGHT [kg]		WEIGHT	4,10	4,90	6,10	7,50	8,80	10,8
	DXCxG [m]		PACKAGE	1,25x0,4x0,08	1,49x0,43x0,08	1,73x0,46x0,08	1,97x0,49x0,08	2,19x0,52x0,08	2,43x0,55x0,08

HOME

FOR HOME USE



18



■ MINIFERO 2 125 KG



■ MINIFERO 3 125 KG

MINIFERO 125 KG

STEEL HOUSEHOLD LADDER
SINGLE-SIDED ACCESS

- Dedicated for everyday work in **households**
- Sturdy ladder construction made of powder-coated steel
- Steel working platform with a specially embossed surface guarantees safe work

- Wide, notched steps
- Special plastic feet ensure work stability
- Safe headband
- Load capacity max. 125 kg

MINIFERO 125 KG		NUMBER OF STEPS	2	3
	A [m]	WORKING HEIGHT	2,47	2,70
	B [m]	PLATFORM HEIGHT	0,47	0,70
	C [m]	LADDER WIDTH	0,47	0,47
	D [m]	LADDER LENGTH	0,91	1,16
	G [m]	LADDER THICKNESS	0,05	0,05
	WEIGHT [kg]	WEIGHT	3,60	5,30
	DxCxG [m]	PACKAGE	0,91x0,46x0,05	1,16x0,47x0,05

CERTIFICATE
EN 14183
PROFESSIONAL USE



■ KITCHEN STEPS 3 150 KG



■ KITCHEN STEPS 2 150 KG



KS 150 KG

STEEL HOUSEHOLD LADDER
SINGLE-SIDED ACCESS

- Dedicated for work in **households**
- Sturdy ladder construction made of powder-coated steel
- Wide steps 0,31 x 0,205 [m] with anti-slip coating

- Special plastic feet ensure work stability
- Comfortable headband
- Load capacity max. 150 kg
- Quality EN 14183

KS 150 KG		NUMBER OF STEPS		2	3
	A [m]	WORKING HEIGHT		2,46	2,69
	B [m]	PLATFORM HEIGHT		0,46	0,69
	C [m]	LADDER WIDTH		0,47	0,47
	D [m]	LADDER LENGTH		1,16	1,40
	G [m]	LADDER THICKNESS		0,15	0,15
	WEIGHT [kg]	WEIGHT		5,00	7,00
	DxCxG [m]	PACKAGE		1,16x0,47x0,15	1,40x0,47x0,15

HOME

FOR HOME USE

CERTIFICATE
EN 14183
 PROFESSIONAL USE



20



■ ST TW 1150 KG



■ ST TW 2150 KG

ST TW 150 KG

STEEL HOUSEHOLD STEP STOOL
 SINGLE-SIDED ACCESS

- Dedicated for everyday work in **households**
- Sturdy ladder construction made of powder-coated steel
- Steel working platform with a specially surface guarantees safe work
- Wide steps
- Special plastic feet ensure work stability
- Load capacity **max. 150 kg**
- Quality EN 14183

ST TW 150 KG		NUMBER OF STEPS		1	2
	A [m]	WORKING HEIGHT	-	-	
	B [m]	PLATFORM HEIGHT	0,27	0,46	
	C [m]	LADDER WIDTH	0,37	0,37	
	D [m]	LADDER LENGTH	0,27	0,46	
	G [m]	LADDER THICKNESS	0,29	0,50	
	WEIGHT [kg]	WEIGHT	1,65	3,10	
	DxCxG [m]	PACKAGE	0,27x0,37x0,29	0,46x0,37x0,50	



■ DW2 HOME 2x6 150 KG



CERTIFICATE
EN 131
NON PROFESSIONAL USE

DW2 HOME 150 KG

ALUMINUM LADDER FOR HOME

- Two-element ladder BASIC is an excellent tool for home DIY enthusiasts
- Stabilizer mounted only with screws! Profile 40x20 [mm]
- Solid hooks and automatic locks
- Rungs with a 25x25 [mm] profile have grooves, attached to the profile with a strong pressing system
- Clamp-on anti-slip feet and bumpers make it easy to set the ladder in a free-standing position
- Load capacity max. 150 kg
- Quality EN 131

DW2 HOME 150 KG		NUMBER OF RUNGS	2x6	2x7	
<small>MEASUREMENTS & WEIGHTS MAY VARY ±5%</small> 	A1 [m]	WORKING HEIGHT	2,95	3,16	
	A2 [m]	WORKING HEIGHT	3,70	3,96	
	B1 [m]	LADDER LENGTH	1,64	1,91	
	B2 [m]	LADDER LENGTH	2,70	2,97	
	C [m]	LADDER WIDTH	0,45	0,45	
	G [m]	LADDER THICKNESS	0,095	0,095	
	WEIGHT [kg]			5,50	6,00


HOME

FOR HOME USE

22



■ DW3 HOME 3x9 150 KG

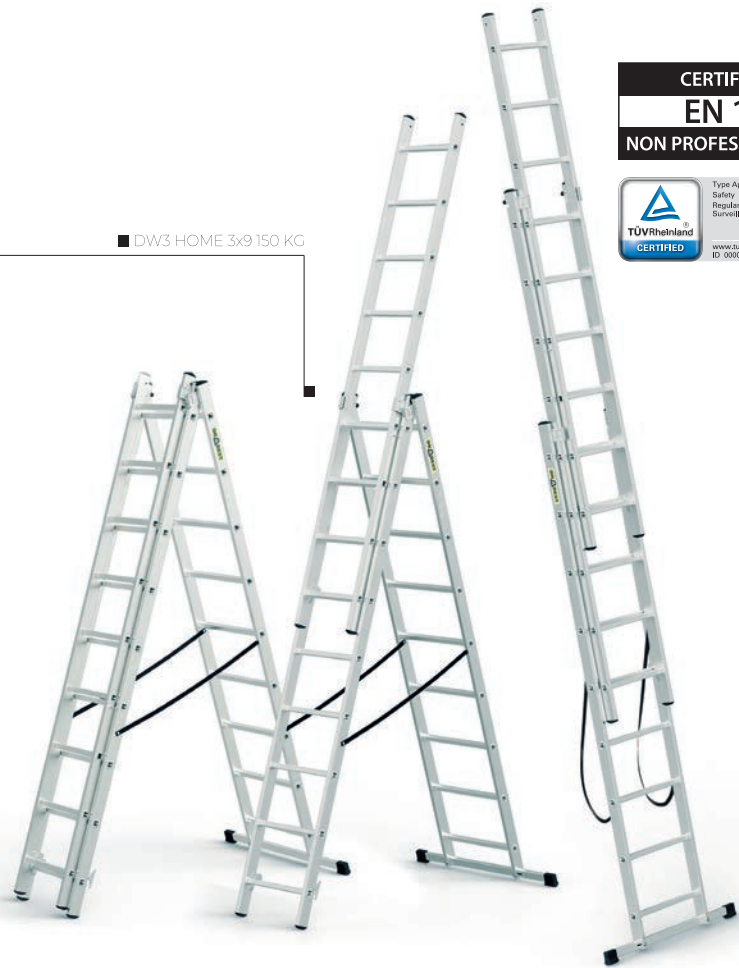

DW3 HOME 150 KG

ALUMINUM LADDER FOR HOME

- The HOME three-element ladder is an excellent tool for home DIY enthusiasts
- Stabilizer mounted only with screws!
- Rungs with a 25x25 [mm] profile have grooves, attached to the profile with a strong pressing system
- Solid hooks and automatic locks.
- Black clamp-on anti-slip feet and bumpers make it easy to set the ladder in a free-standing position
- Load capacity max. 150 kg
- Quality EN 131
- Certified by TÜV Rheinland 3x6, 3x7, 3x9, 3x11

DW3 HOME 150 KG		NUMBER OF RUNGS	3x6	3x7	3x8	3x9	3x10	3x11	
	A1 [m]	WORKING HEIGHT	3,17	3,42	3,94	4,49	4,44	5,26	
	A2 [m]	WORKING HEIGHT	3,98	4,23	4,97	5,47	5,72	6,55	
	B1 [m]	LADDER LENGTH	1,65	1,90	2,20	2,46	2,70	2,99	
	B2 [m]	LADDER LENGTH	2,97	3,25	4,02	4,54	4,80	5,64	
	C [m]	LADDER WIDTH	0,46	0,46	0,45	0,46	0,45	0,46	
	G [m]	LADDER THICKNESS	0,13	0,13	0,16	0,16	0,16	0,18	
		WEIGHT [kg]		8,00	9,10	11,00	12,50	13,40	15,10



■ DU HOME 4x3 150 KG



DU HOME 150 KG

ALUMINUM MULTI-PURPOSE LADDER 4X3 WITH PLATFORM

- An aluminum multi-purpose ladder DRABEST is an excellent tool for home DIY enthusiasts
- The rungs of the 28x28 [mm] profile are **grooved** to ensure safety, attached to the profile with a strong pressing system
- Two stabilizers 60x20 [mm]
- Black **non-slip feet** in the stabilizer protect against the ladder sliding
- Platform - not included (additional option)
- Load capacity **max. 150 kg**

DU HOME 150 KG		NUMBER OF RUNGS	4x3
A1/A2/A3/A4 [m]	WORKING HEIGHT	2,90/3,01/3,81/4,34	
B1/B2/B3/B4/B5 [m]	LADDER LENGTH	0,90/1,80/2,60/3,45/0,95	
C [m]	LADDER WIDTH	0,35	
G [m]	LADDER THICKNESS	0,25	
S [m]	STABILIZER	0,825 - 2 PIECES	
WEIGHT [kg]	WEIGHT	11,80	
BxCxG [m]	PACKAGE	0,25x0,95x0,35	

MEASUREMENTS & WEIGHTS MAY VARY +/-5%

HOME

FOR HOME USE




24



NOT INCLUDED



CERTIFICATE
EN 131
NON PROFESSIONAL USE



ARD HOME

ALUMINUM SCAFFOLDING


- Dedicated for work in households
- Solid scaffolding structure made of aluminum
- Wide working platform 1,14 x 0,34 [m], a special surface of the platform ensures stability and safety during work
- 25x25 [mm] grooved rungs pressed to the profile
- Stabilizer with a dimension 0,90 [m]
- Special non-slip feet ensure the highest safety standard
- 3in1: scaffolding, leaning ladder, free-standing ladder!
- Load capacity max. 150 kg
- Quality EN 131

ARD HOME		NUMBER OF RUNGS	ARD HOME 2x6	ARD HOME 2x7	ARD HOME 2x8
	A1/A2/A3 [m]	WORKING HEIGHT	2,97/2,89/3,68	2,97/3,14/4,18	2,97/3,40/4,70
	B1 [m]	LADDER LENGTH	1,61	1,87	2,14
	B2 [m]	LADDER LENGTH	2,67	3,20	3,73
	C [m]	LADDER LENGTH	0,46	0,46	0,46
	E [m]	WIDTH	1,14	1,14	1,14
	S [kg]	STABILIZER	0,90	0,90	0,90
	WEIGHT [kg]	WEIGHT	11,0	12,0	13,0

PRO



PRO product range
approved for
professional use

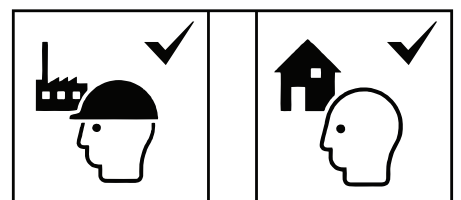

PRO

FOR PROFESSIONALS

CERTIFICATE
EN 131
PROFESSIONAL USE



■ INCLUDED



■ ALD 5-6-7-8 150 KG

■ ALD 4 150 KG

26

ALD 150 KG + HOOK

ALUMINUM HOUSEHOLD LADDER WITH HOOK
SINGLE-SIDED ACCESS

- Dedicated for everyday work in households, office and warehouse spaces as well as occasional renovations
- Safe 0,60 [m] headband with a hook for a bucket
- Steel powder coated working platform 0,25 x 0,26 [m] with a specially embossed surface guarantees work safety
- Notched steps riveted and secured with yellow plastic covers
- Special non-slip feet, screwed to the profile
- Load capacity max. 150 kg
- Quality EN 131
- Certified by TÜV Rheinland

ALD 150 KG		NUMBER OF STEPS						
		3	4	5	6	7	8	
<p>MEASUREMENTS & WEIGHTS MAY VARY +/-5%</p>	A [m] WORKING HEIGHT	2,54	2,75	2,97	3,19	3,40	3,62	
	B [m] PLATFORM HEIGHT	0,54	0,75	0,97	1,19	1,40	1,62	
	C [m] LADDER WIDTH	0,40	0,43	0,45	0,48	0,50	0,52	
	D [m] LADDER LENGTH	1,21	1,45	1,68	1,91	2,15	2,37	
	G [m] LADDER THICKNESS	0,12	0,12	0,12	0,12	0,12	0,12	
	WEIGHT [kg] WEIGHT	3,20	3,70	4,30	5,10	5,80	6,60	
	DxCxG [m] WYMIARY OPAKOWANIA	1,21x0,4x0,12	1,45x0,43x0,12	1,68x0,45x0,12	1,91x0,45x0,12	2,15x0,50x0,12	2,37x0,52x0,12	



ALDP 150 KG

ALUMINUM HOUSEHOLD LADDER WITH TOOL SHELF
SINGLE-SIDED ACCESS

- Dedicated for work in **households**
- Light structure, convenient for storage
- Safe 0,60 [m] headband **with tool shelf**
- Steel **powder coated** platform 0,25 x 0,26 [m], specially embossed surface of the platform ensures stability and work safety
- Load capacity max. 150 kg
- Notched steps, riveted and secured with yellow plastic covers
- Special non-slip feet **screwed to the profile** to ensure the highest safety standard, protect the floor against scratches!
- Quality EN 131

ALDP 150 KG		NUMBER OF STEPS		3	4	5	6	7	8
	A [m]	WORKING HEIGHT	2,54	2,75	2,97	3,19	3,40	3,62	
	B [m]	PLATFORM HEIGHT	0,54	0,75	0,97	1,19	1,40	1,62	
	C [m]	LADDER WIDTH	0,40	0,43	0,45	0,48	0,50	0,52	
	D [m]	LADDER LENGTH	1,21	1,45	1,68	1,91	2,15	2,37	
	G [m]	LADDER THICKNESS	0,12	0,12	0,12	0,12	0,12	0,12	
	WEIGHT [kg]		WEIGHT	3,20	3,70	4,30	5,10	5,80	6,60
	DxCxG [m]		PACKAGE	1,21x0,4x0,12	1,45x0,43x0,12	1,68x0,45x0,12	1,91x0,45x0,12	2,15x0,50x0,12	2,37x0,52x0,12

PRO

FOR PROFESSIONALS

CERTIFICATE
EN 131
PROFESSIONAL USE



■ INCLUDED



■ ALDP+P 4 150 KG

■ ALDP+P 5-6-7-8 150 KG



28

ALDP+P 150 KG

ALUMINUM HOUSEHOLD LADDER WITH TOOL SHELF + HANDRAILS
SINGLE-SIDED ACCESS

- Dedicated for everyday work in households, office and warehouse spaces as well as occasional renovations
- Ergonomic handrails help when using the ladder
- Steel powder coated platform 0,25 x 0,26 [m], specially embossed surface of the platform ensures stability and work safety
- Safe 0,60 [m] headband with tool shelf
- Notched steps riveted and secured with yellow plastic covers
- Special non-slip feet screwed to the profile to ensure the highest safety standard
- Load capacity max. 150 kg
- Quality EN 131

ALDP+P 150 KG		NUMBER OF STEPS					
		4	5	6	7	8	
	A [m] WORKING HEIGHT	2,75	2,97	3,19	3,40	3,62	
	B [m] PLATFORM HEIGHT	0,75	0,97	1,19	1,40	1,62	
	C [m] LADDER WIDTH	0,43	0,45	0,48	0,50	0,52	
	D [m] LADDER LENGTH	1,45	1,68	1,91	2,15	2,37	
	G [m] LADDER THICKNESS	0,12	0,12	0,12	0,12	0,12	
	WEIGHT [kg] WEIGHT	3,70	4,30	5,10	5,80	6,60	
	DxCxG [m] PACKAGE	1,45x0,43x0,12	1,68x0,45x0,12	1,91x0,45x0,12	2,15x0,50x0,12	2,37x0,52x0,12	



■ *Working platform
MODELS: 2x2-2x4



■ Working platform
MODELS: 2x5-2x8



CERTIFICATE
EN 131
PROFESSIONAL USE



DD 2X3-2X8

CERTIFICATE
EN 14183
PROFESSIONAL USE



DD 2X2

DD 150 KG

ALUMINUM HOUSEHOLD LADDER
DOUBLE-SIDED ACCESS

- Dedicated for work in households, office and warehouse spaces as well as occasional renovations
- Solid ladder construction made of durable aluminum
- Light, compact, easy to store
- Convenient work platform* 0,20 x 0,345 [m] / 0,16 x 0,34 [m]
- Additional securing belts to prevent sliding
- Notched steps riveted and secured with yellow plastic covers
- Non-slip feet, screwed to the profile
- Load capacity max. 150 kg
- Quality EN 131/EN 14183
- Certified by TÜV Rheinland

DD 150 KG		NUMBER OF STEPS	2x2	2x3	2x4	2x5	2x6	2x7	2x8	
<p>MEASUREMENTS & WEIGHTS MAY VARY ±5%</p>	A [m]	WORKING HEIGHT	2,38	2,60	2,81	3,02	3,23	3,44	3,66	
	B [m]	PLATFORM HEIGHT	0,38	0,60	0,81	1,02	1,23	1,44	1,66	
	C [m]	LADDER WIDTH	0,39	0,41	0,44	0,46	0,48	0,51	0,53	
	D [m]	LADDER LENGTH	0,41	0,63	0,87	1,10	1,33	1,56	1,79	
	G [m]	LADDER THICKNESS	0,16	0,16	0,16	0,16	0,16	0,16	0,16	
	WEIGHT [kg]		WEIGHT	1,70	2,40	3,20	4,20	4,90	5,80	6,80
	DxCxG [m]		PACKAGE	0,41x0,39x0,16	0,63x0,41x0,16	1,10x0,46x0,16	1,10x0,46x0,16	1,33x0,48x0,16	1,56x0,51x0,16	1,79x0,53x0,16

PRO

FOR PROFESSIONALS



30



■ DREW 2x7 150 KG



CERTIFICATE
EN 131
PROFESSIONAL USE

DREW 150 KG

WOODEN LADDER
DOUBLE-SIDED ACCESS

- Wooden ladder can be used for painting or a variety of other works carried out around the house and in the garden
- Additional elements of the ladder are made of galvanized steel, including a hook mounted at the top of the ladder and reinforcing bars
- Made of impregnated pine wood
- Load capacity **max. 150 kg**
- Quality EN 131

DREW 150 KG		2x3	2x4	2x5	2x6	2x7
	A [m] WORKING HEIGHT	2,40	2,70	3,00	3,30	3,60
	B [m] PLATFORM HEIGHT	0,30	0,59	0,88	1,17	1,46
	C [m] LADDER WIDTH	0,45	0,49	0,53	0,57	0,61
	D [m] LADDER LENGTH	0,95	1,24	1,53	1,82	2,11
	G [m] LADDER THICKNESS	0,13	0,13	0,13	0,13	0,13
	WEIGHT [kg] WEIGHT	5,00	6,00	7,00	8,50	10,0
	DxCxG [m] PACKAGE	0,95x0,45x0,113	1,24x0,49x0,13	1,53x0,53x0,13	1,82x0,57x0,13	2,11x0,61x0,13



DP PRO 12 150 KG

DP PRO 150 KG

INDUSTRIAL ALUMINUM LADDER

- Professional leaning ladder PRO, used by thousands of specialists servicing appliances, doing maintenance or finishing interiors
- Models from 12 to 18 steps have an additional stabilizer
- Load capacity max. 150 kg
- Completed with non-slip feet that protect against ladder sliding
- The rungs are grooved to ensure safety, attached to the profile with a strong pressing system, models 5-14 rungs of the 25x25 [mm] profile, models 15-18 rungs of the 28x28 [mm] profile
- Quality EN 131
- Certified by TÜV Rheinland

DP PRO 150 KG		NUMBER OF RUNGS																
		5	6	7	8	9	10	11	12	13	14	15	16	17	18			
MEASUREMENTS & WEIGHTS MAY VARY ± 5%	A [m]	WORKING HEIGHT	2,43	2,69	2,98	3,24	3,46	3,72	3,97	4,24	4,50	4,75	5,00	5,26	5,52	5,78		
	B [m]	LADDER LENGTH	1,39	1,65	1,92	2,18	2,45	2,71	2,98	3,25	3,52	3,78	4,05	4,32	4,58	4,85		
	C [m]	LADDER WIDTH	0,40	0,40	0,40	0,40	0,40	0,40	0,40	0,40	0,40	0,41	0,41	0,41	0,41			
	G [m]	LADDER THICKNESS	0,05	0,05	0,05	0,05	0,05	0,05	0,06	0,06	0,06	0,06	0,08	0,08	0,08	0,08		
	S [m]	STABILIZER	-	-	-	-	-	-	-	0,825	0,825	0,825	0,825	0,905	0,905	0,905		
	WEIGHT [kg]	WEIGHT	200	2,30	2,70	3,00	3,40	3,70	4,50	5,00	5,50	6,00	9,50	10,3	10,8	11,3		

PRO

FOR PROFESSIONALS



■ DW2 PRO 2x13 150 KG



32

DW2 PRO 150 KG

INDUSTRIAL ALUMINUM LADDER

- Professional two-element ladder PRO is a perfect work tool for specialists looking for the highest standards of safety and durability
- Stabilizer mounted only with screws! Profile 60x20 [mm]
- Rungs with a 28x28 [mm] profile have grooves, attached to the profile with a strong pressing system
- Clamp-on anti-slip feet and bumpers make it easy to set the ladder in a free-standing position
- Solid hooks, guiding profile elements and automatic locks
- Load capacity max. 150 kg
- Quality EN 131
- Certified by TÜV Rheinland

DW2 PRO 150 KG		NUMBER OF RUNGS				
		2x7	2x9	2x10	2,11	2x13
	A1 [m] WORKING HEIGHT	3,22	3,72	3,98	4,23	4,62
	A2 [m] WORKING HEIGHT	4,25	5,02	5,53	5,78	6,55
	B1 [m] LADDER LENGTH	1,94	2,46	2,72	2,98	3,52
	B2 [m] LADDER LENGTH	3,00	3,79	4,32	4,58	5,64
	C [m] SZEROKOŚĆ DRABINY	0,46	0,46	0,46	0,46	0,48
	G [kg] LADDER THICKNESS	0,11	0,12	0,14	0,14	0,14
	WEIGHT [kg] WEIGHT	7,20	9,00	10,30	11,20	17,20

CERTIFICATE
EN 131
PROFESSIONAL USE



■ DW3 PRO 3x19 150 KG



■ *FUNCTION ON STAIRS NOT INCLUDED



DW3 PRO 150 KG

INDUSTRIAL ALUMINUM LADDER

- Professional three-element ladder PRO is a perfect work tool for specialists looking for the highest standards of safety and durability
- Stabilizer mounted only with screws!
- Rungs with a 28x28 [mm] profile have **grooves**, attached to the profile with a strong **pressing system**
- Possibility of using the ladder on stairs*
- Clamp-on anti-slip feet
- Bumpers make it easy to set the ladder in a free-standing position
- Solid hooks, guiding profile elements and automatic locks
- Load capacity max. 150 kg
- Quality EN 131
- Certified by TÜV Rheinland

DW3 PRO 150 KG		NUMBER OF RUNGS											
		3x6	3x7	3x8	3x9	3x10	3x11	3x12	3x13	3x14	3x15	3x16	
	A1 [m]	WORKING HEIGHT	3,40	3,75	4,00	4,51	5,01	5,01	6,04	6,56	7,06	7,58	8,08
	A2 [m]	WORKING HEIGHT	4,43	5,05	5,05	5,84	6,31	6,31	8,09	8,61	9,62	10,40	10,83
	B1 [m]	LADDER LENGTH	1,68	1,95	2,20	2,46	2,72	2,98	3,25	3,52	3,78	4,05	4,31
	B2 [m]	LADDER LENGTH	3,45	4,09	4,09	4,90	5,39	5,39	7,24	7,77	8,82	9,62	10,07
	C [m]	LADDER WIDTH	0,45	0,45	0,45	0,45	0,45	0,45	0,48	0,48	0,48	0,48	0,48
	G [kg]	LADDER THICKNESS	0,16	0,16	0,16	0,16	0,18	0,18	0,19	0,19	0,22	0,22	0,22
	WEIGHT [kg]	WEIGHT	9,10	10,2	11,5	13,0	15,1	16,4	23,0	24,6	30,0	32,0	34,0

PRO

FOR PROFESSIONALS

34

CERTIFICATE
EN 131
PROFESSIONAL USE



■ DU PRO 4x3 150 KG


DU PRO 150 KG

ALUMINUM MULTI-PURPOSE LADDER 4X3 WITH PLATFORM

- An aluminum multi-purpose ladder PRO is an excellent tool for DIY enthusiasts and professionals
- Two stabilizers 60x20 [mm]
- The rungs of the 28x28 [mm] profile are grooved to ensure safety, attached to the profile with a strong pressing system
- Black non-slip feet in the stabilizer protect against ladder shifts
- Platform made of waterproof non-slip plywood folds together with the ladder, equipped with a quick snap-in assembly
- Load capacity max. 150 kg
- Waterproof non-slip plywood platform included!
- Quality EN 131
- Certified by TÜV Rheinland

DU PRO 150 KG		NUMBER OF RUNGS	4x3
A1/A2/A3/A4 [m]	WORKING HEIGHT	2,90/3,01/3,81/4,34	
B1/B2/B3/B4/B5 [m]	LADDER LENGTH	0,90/1,80/2,60/3,45/0,95	
C [m]	LADDER WIDTH	0,35	
G [m]	LADDER THICKNESS	0,25	
S [m]	STABILIZER	0,825 - 2 SZTUKI	
WEIGHT [kg]	WEIGHT	15,20	
BxCxG [m]	PACKAGE	0,25x0,95x0,35	

CERTIFICATE
EN 131
PROFESSIONAL USE



NOT INCLUDED

ARD PRO

PROFESSIONAL ALUMINUM SCAFFOLDING

- Dedicated for work in households
- Solid scaffolding structure made of aluminum
- Wide working platform 1,50 x 0,46 [m], special surface of the platform ensures stability and safety during work
- 28x28 [mm] grooved rungs pressed to the profile
- Stabilizer with a dimension 1,10 [m]
- Special non-slip feet ensure the highest safety standard
- 3in1: scaffolding, leaning ladder, free-standing ladder!
- Load capacity max. 150 kg
- Quality EN 131

ARD PRO		NUMBER OF RUNGS	ARD PRO 2x6	ARD PRO 2x7	ARD PRO 2x8
<p>MEASUREMENTS & WEIGHTS MAY VARY +/-5%</p>	A1/A2/A3 [m]	WORKING HEIGHT	2,97/2,89/3,68	2,97/3,14/4,18	2,97/3,40/4,70
	B1 [m]	LADDER LENGTH	1,61	1,87	2,14
	B2 [m]	LADDER LENGTH	2,67	3,20	3,73
	C [m]	LADDER WIDTH	0,58	0,58	0,58
	E [m]	WIDTH	1,50	1,50	1,50
	S [kg]	STABILIZER	1,10	1,10	1,10
	WEIGHT [kg]	WEIGHT	16,0	17,0	18,0

PRO

FOR PROFESSIONALS




36



■ INCLUDED



CERTIFICATE
EN 131
PROFESSIONAL USE




IKAR

ALUMINUM SCAFFOLDING

- IKAR aluminum ladder scaffolding is a mobile structure for the construction industry
- Wide working platform 1,30 x 0,60 [m]
- 28x28 [mm] grooved rungs pressed to the profile
- Stabilizer with a dimension 1,10 [m]
- Special joints facilitate the assembly of the structure
- Strong plastic wheels
- 3in1: scaffolding, leaning ladder, free-standing ladder!
- Load capacity max. 150 kg
- Quality EN 131

IKAR		IKAR V1	IKAR V2
	A1 [m]	WORKING HEIGHT	A2 3,25
	B1 [m]	LADDER LENGTH	B2 3,00
	C [m]	LADDER WIDTH	
	E [m]	WIDTH	
	S [m]	STABILIZER	
	WEIGHT [kg]	WEIGHT	27,0
	[m]	PACKAGE	0,30x0,32x1,65

CERTIFICATE
EN 1004
PROFESSIONAL USE



■ 3w1!



■ INCLUDED

HECTOR

PROFESSIONAL ALUMINUM SCAFFOLDING

- HECTOR aluminum ladder scaffolding is a multi-purpose mobile structure for the construction industry
- Wide working platform 1,34 x 0,60 [m]
- 28x28 [mm] grooved rungs pressed to the profile
- Wall mounting kit included!
- Side protection panels included
- Special joints facilitate the assembly of the structure
- Stabilizer with a dimension 1,30 [m] is movable so you can position the scaffolding at any distance from the wall
- 3in1: scaffolding, leaning ladder, free-standing ladder!
- Load capacity max. 200 kg
- Quality EN 1004


HECTOR		HECTOR	
<p>MEASUREMENTS & WEIGHTS MAY VARY +/-5%</p>	A1 [m]	WORKING HEIGHT	4,73
	B1 [m]	LADDER LENGTH	3,91
	C [m]	LADDER WIDTH	0,57
	E [m]	WIDTH	1,51
	S [m]	STABILIZER	1,31
	WEIGHT [kg]	WEIGHT	43,6
	[m]	PACKAGE	0,57x0,325x2,00

PRO

FOR PROFESSIONALS




38

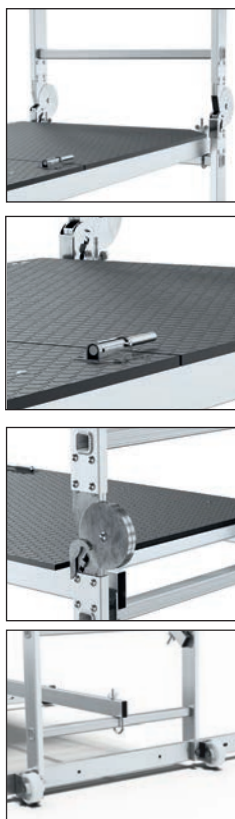

■ INCLUDED



CERTIFICATE
EN 131
PROFESSIONAL USE




HECTOR BASIC

ALUMINUM SCAFFOLDING


- HECTOR BASIC aluminum ladder scaffolding is a multi-purpose mobile structure for the construction industry
- Wide working platform 1,34 x 0,60 [m]
- 28x28 [mm] grooved rungs pressed to the profile
- Wall mounting kit NOT included
- Load capacity max. 150 kg
- **Stabilizer** with a dimension 1,30 [m] is movable so you can position the scaffolding at any distance from the wall
- Special joints facilitate the assembly of the structure
- 3in1: scaffolding, leaning ladder, free-standing ladder!
- Quality EN 131

HECTOR BASIC		HECTOR BASIC V1	HECTOR BASIC V2									
	A1 [m]	WORKING HEIGHT	4,00									
	B1 [m]	LADDER LENGTH	3,91									
	C [m]	LADDER WIDTH	0,57									
	E [m]	WIDTH	1,51									
	S [m]	STABILIZER	1,31									
	WEIGHT [kg]	WEIGHT	40,6									
	[m]	PACKAGE	0,57x0,325x2,00									
			<table border="1"> <thead> <tr> <th colspan="2">HECTOR BASIC V1</th> <th>HECTOR BASIC V2</th> </tr> </thead> <tbody> <tr> <td>A2</td> <td>2,80</td> <td></td> </tr> <tr> <td>B2</td> <td>2,00</td> <td></td> </tr> </tbody> </table>	HECTOR BASIC V1		HECTOR BASIC V2	A2	2,80		B2	2,00	
HECTOR BASIC V1		HECTOR BASIC V2										
A2	2,80											
B2	2,00											

MAX

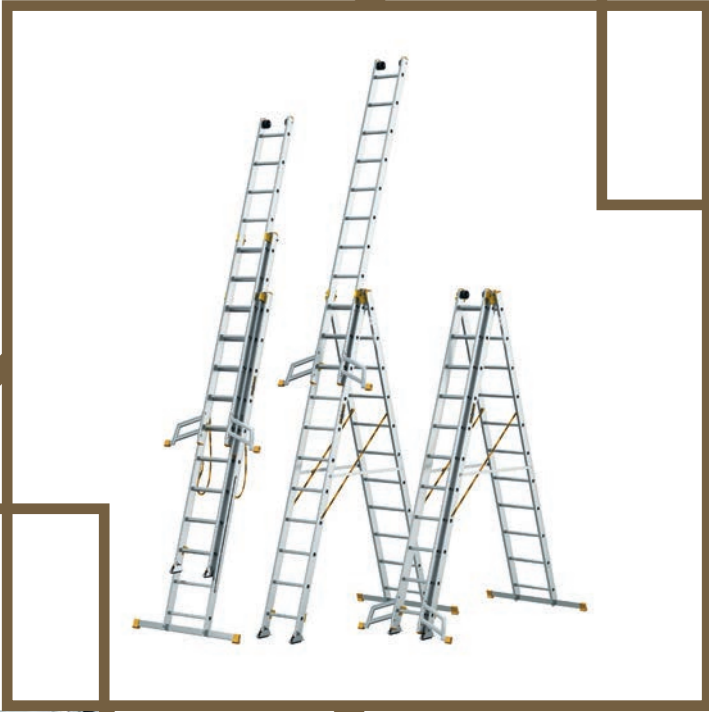


MAX product range
approved
for professional use

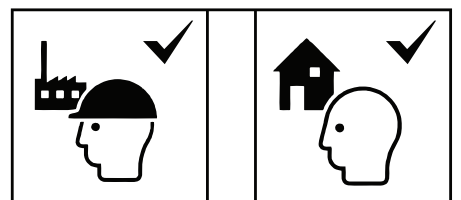

MAX

RELIABLE LADDERS

40

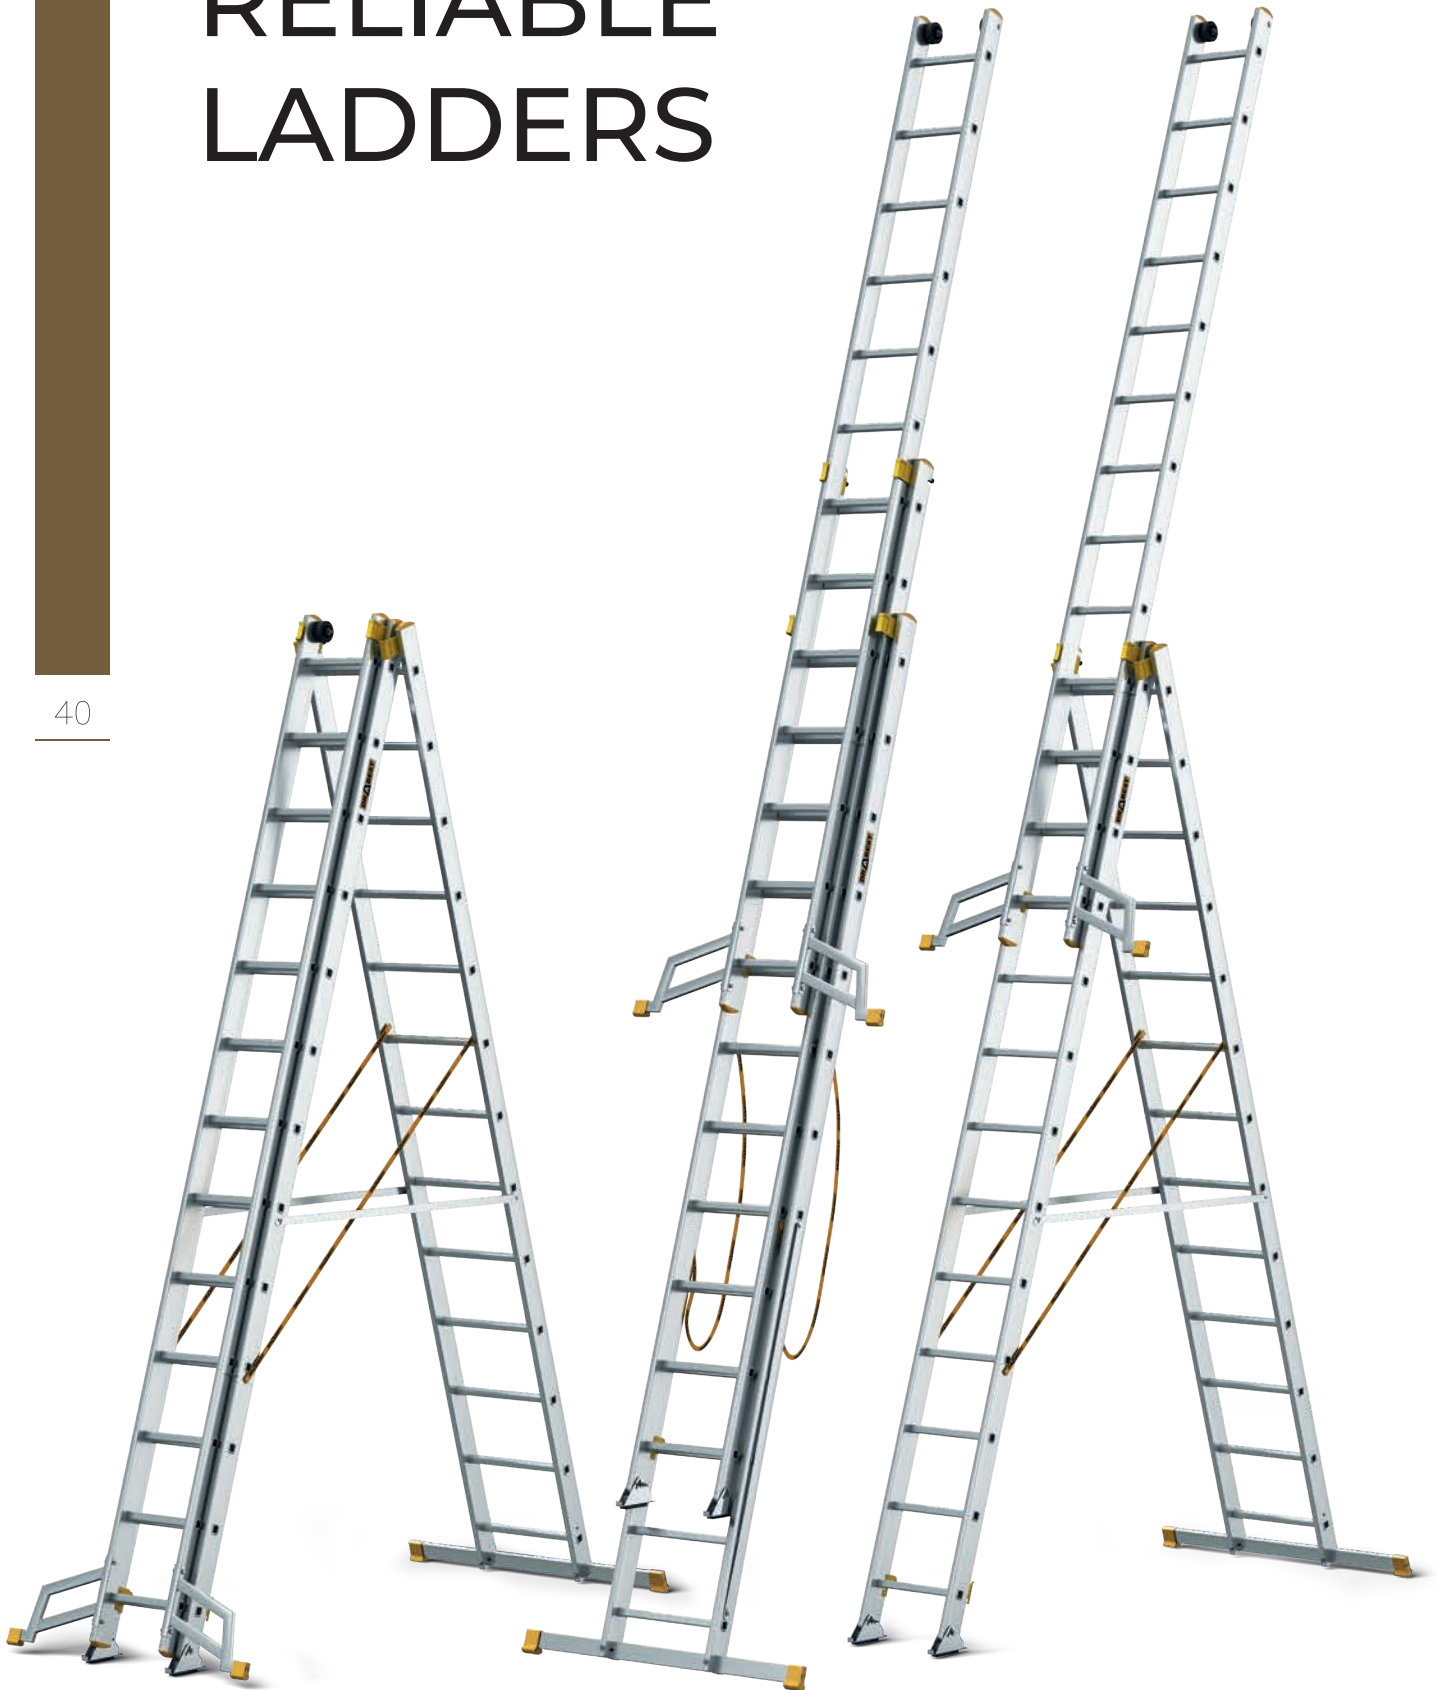



■ DW3 MAX 3x7 150 KG



MAX

FOR PROFESSIONALS



42

■ DW3 MAX 3x13 150 KG

DW3 MAX 150 KG

INDUSTRIAL ALUMINUM LADDER

- Professional three-element ladder MAX is a multifunctional tool for professional and domestic use
- Movable foot with a large rubber non-slip surface will adapt the ladder to any type of ground - function to the ground!
- Rubber swivel casters make it easy to unfold the ladder and protect the wall from damage
- Additional steel bracket stiffens the structure in the free-standing position increasing comfort and safety of work
- Sturdy catches, guiding profile elements, automatic locks
- Steel elements are double-protected against corrosion
- Additional stabilizer in 3x11 and 3x13 models for the third ladder segment provides exceptional stability
- Rungs with 28x28 [mm] profile have grooves
- Load capacity **max. 150 kg**
- Manufactured in accordance with EN 131 PROFESSIONAL USE

DW3 MAX 150 KG		NUMBER OF RUNGS	3x7	3x9	3x11	3x13
	A1 [m]	WORKING HEIGHT	4,00	4,70	6,10	6,90
	A2 [m]	WORKING HEIGHT	5,30	6,13	8,34	10,07
	B1 [m]	LADDER LENGTH	2,12	2,71	3,29	3,87
	B2 [m]	LADDER LENGTH	4,41	5,30	7,61	9,37
	C [m]	LADDER WIDTH	0,45	0,45	0,48	0,48
	G [m]	LADDER THICKNESS	0,16	0,18	0,22	0,22
	WEIGHT [kg]	WEIGHT	13,00	16,00	25,70	33,00



■ DW3 MAX 3x11 150 KG



ACCESSORIES


Increase the
functionality of
your ladder





UNIVERSAL ROOF HOOK KIT

FOR ALL LADDER
MODELS

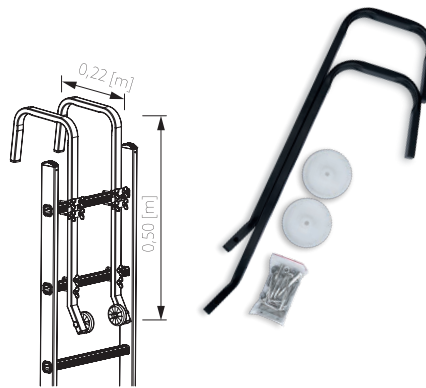

45

ROOF HOOK KIT

ROOF HOOK KIT - UNIVERSAL - FITS ALL LADDERS

- Special handle for working on the roof
- Steel handle for industrial ladders, powder coated
- Strong plastic wheels allow the ladder to be moved on the roof!
- Dimensions: 0,50 x 0,22 [m]
- Weight: 2,45 kg



WHEELS FOR INDUSTRIAL LADDERS


FOR ALL DRABEST LADDERS

- Plastic wheels for industrial ladders
- Easy to assemble

LADDER ACCESSORIES

BUMPER - SPACER HOLDER

- Steel handle for industrial ladders, powder coated
- Dedicated to work on the renovation of walls and cleaning gutters

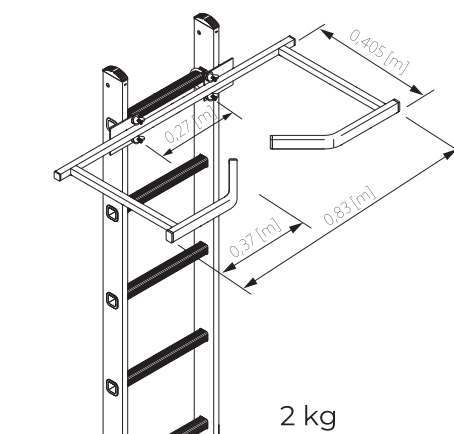

46


FUNCTION FOR STAIRS

FOR INDUSTRIAL LADDER

- Steel ladder locking system allowing to open a 3-piece ladder on the stairs



DW3

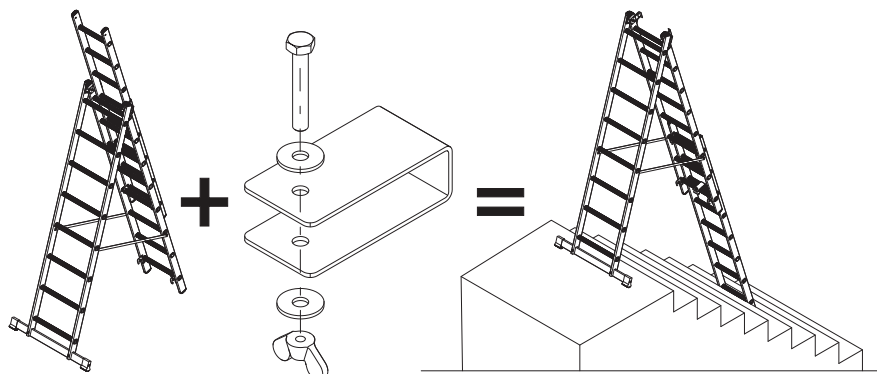

CAR ROOF RACK LADDER CLAMPS

- Roof rack for transporting a ladder
- Easy to assemble!




UNIVERSAL WALL-WELDED HANDLE FOR STORING

- Aluminum bracket for storing the ladder on the wall
- Length 0,32 [m]! The longest handle on the market!
- For all types of ladders!



47

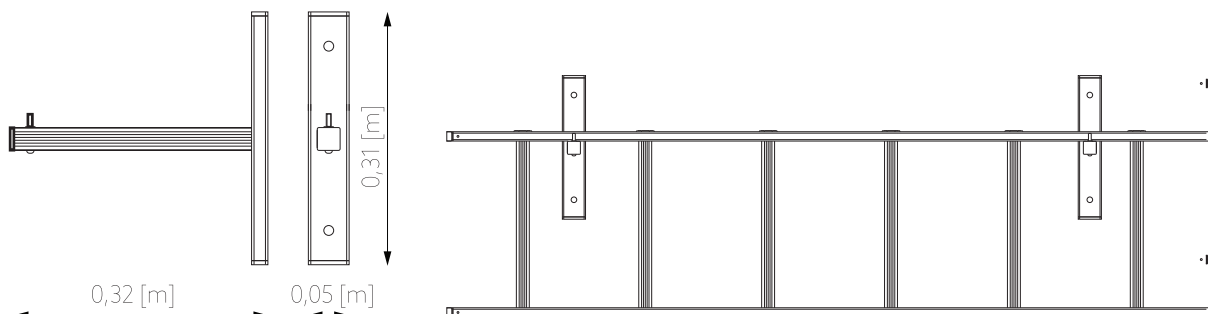

LADDER ACCESSORIES

48

STEEL HOOK FOR THE INDUSTRIAL LADDER

- Steel hook, powder coated
- Dimensions: 0,31 x 0,05 x 0,47[m]; 0,4 kg



STEEL PLATFORM FOR THE INDUSTRIAL LADDER

- For all industrial ladders
- Powder coated
- Dimensions: 0,265 x 0,250 [m]; 1,5kg
- Maximum load: 150 kg





HOOK FOR THE HOUSEHOLD LADDER


- Plastic, dyed in mass
- Dimensions: 0,05 x 0,045 x 0,03 [m]
- Maximum load: 10 kg
- For ALD ladders



TOOL SHELF FOR THE HOUSEHOLD LADDER

- Plastic, dyed in mass
- Dimensions: 0,30 x 0,14 x 0,145 [m]; 0,25 kg
- Maximum load: 10 kg
- Equipped with a hook on which you can hang a container with paint

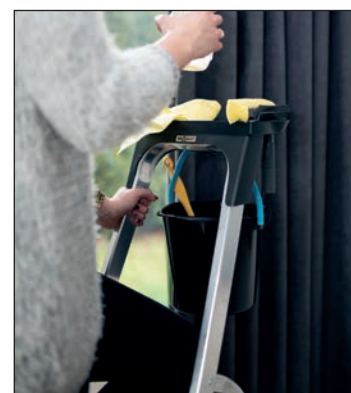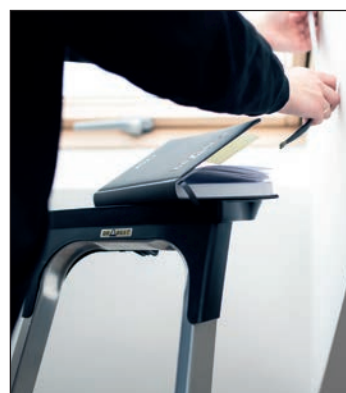


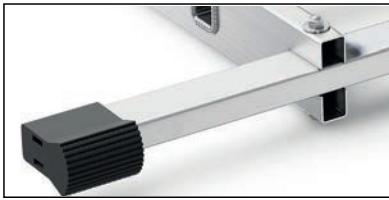

ALUMINUM STABILIZER FOR MULTI-FUNCTIONAL LADDERS


- Strong aluminum profile
- Non-slip plastic feet
- Stabilizes the ladder

Stabilizer 900 [mm]




- Stabilizer assembly instruction
- Stabilizer 980, 1100, 1200 [mm]

■ 1



■ 2



ASSEMBLY INSTRUCTION


49



STABILIZER 900 [MM]

- Profile 60x20 [mm]
- For DW3 PRO*: 3x12, 3x13, 3x14, 3x15, 3x16

*In accordance to the EN 131 standard, a leaning ladder over 3m must have a stabilizer. Stabilizer 900mm is dedicated to the third segment of the ladder used separately as a leaning ladder (not included in set)




900 [MM]



STABILIZER 980 [MM]

- Profile 40x20 [mm]
- For DW3 BASIC: 3x6, 3x7, 3x8, 3x9, 3x10, 3x11

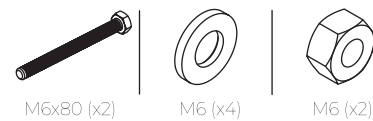


980 [MM]



STABILIZER 1100 [MM]

- Profile 60x20 [mm]
- For DP PRO: 1x12, 1x13, 1x14, 1x15, 1x16, 1x17, 1x18;
DW2 PRO: 2x6, 2x7, 2x8, 2x9, 2x10, 2x11; DW3 PRO: 3x6, 3x7, 3x8, 3x9, 3x10, 3x11




1100 [MM]



STABILIZER 1200 [MM]

- Profile 60x20 [mm]
- For DW2 PRO: 2x12, 2x13, 2x14; DW3 PRO: 3x12, 3x13, 3x14, 3x15, 3x16



1200 [MM]

LADDER ACCESSORIES

NON-SLIP FEET FOR HOUSEHOLD LADDERS

- Special non-slip feet, protect the floor against scratches
- Model/ profile [mm]:
 - 01/ 33 x 20 - for ALD household ladders
 - 02/ 40 x 20 - for ALD and DD household ladders




NON-SLIP FEET FOR MULTIFUNCTIONAL LADDERS

- Solid non-slip feet ensure the stability of the ladders
- Model/ profile [mm]:
 - 01/ 50x20, 02/ 60x20, 03/ 70x20, 04/ 82x25, 05/ 95x25
- Black feet for BASIC ladders - models: 01, 02, 03
- Yellow feet for PRO ladders- models: 02, 03, 04, 05



NON-SLIP FEET FOR STABILIZER

- Solid non-slip feet ensure the stability of the ladders
- Model / profiles [mm]:
 - 01/ 40x20 - for the stabilizer with a profile of 40 x 20 [mm]
 - 02/ 60x25 - for the stabilizer with a profile of 60 x 20 [mm]

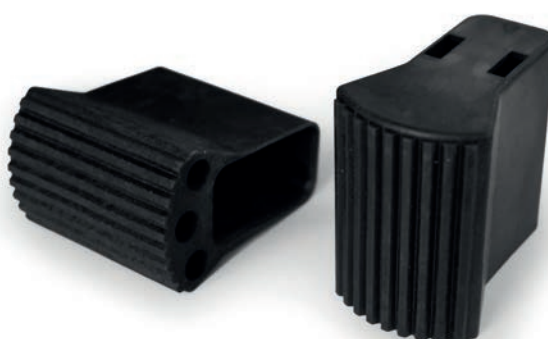

FIRE ESCAPE LADDERS

FIRE ESCAPE LADDERS


The fire escape ladders are an original system developed by the designers at Drabest, who aimed to support the construction industry in the rapidly rising structures. Ready ladder sets are dedicated to overcoming heights ranging from 3 to 10 meters, available in steel or aluminum versions to best match the ladder to the facility. Steel ladders perform well in adverse weather conditions - they are perfect for outdoor use, in large multi-family and industrial buildings. The advantage of aluminum evacuation ladders is their low weight and modern appearance, making this type of structure ideal for smaller residential buildings, both indoors and outdoors

MODULAR EVACUATION LADDERS advantages:

- High quality
- Easy installation
- Self-assembly modules
- Different sets are easily adapted to the height of the object
- Modular evacuation steel ladders made of hot-dip galvanized steel
- Modular evacuation aluminium ladders made of aluminium



NEW

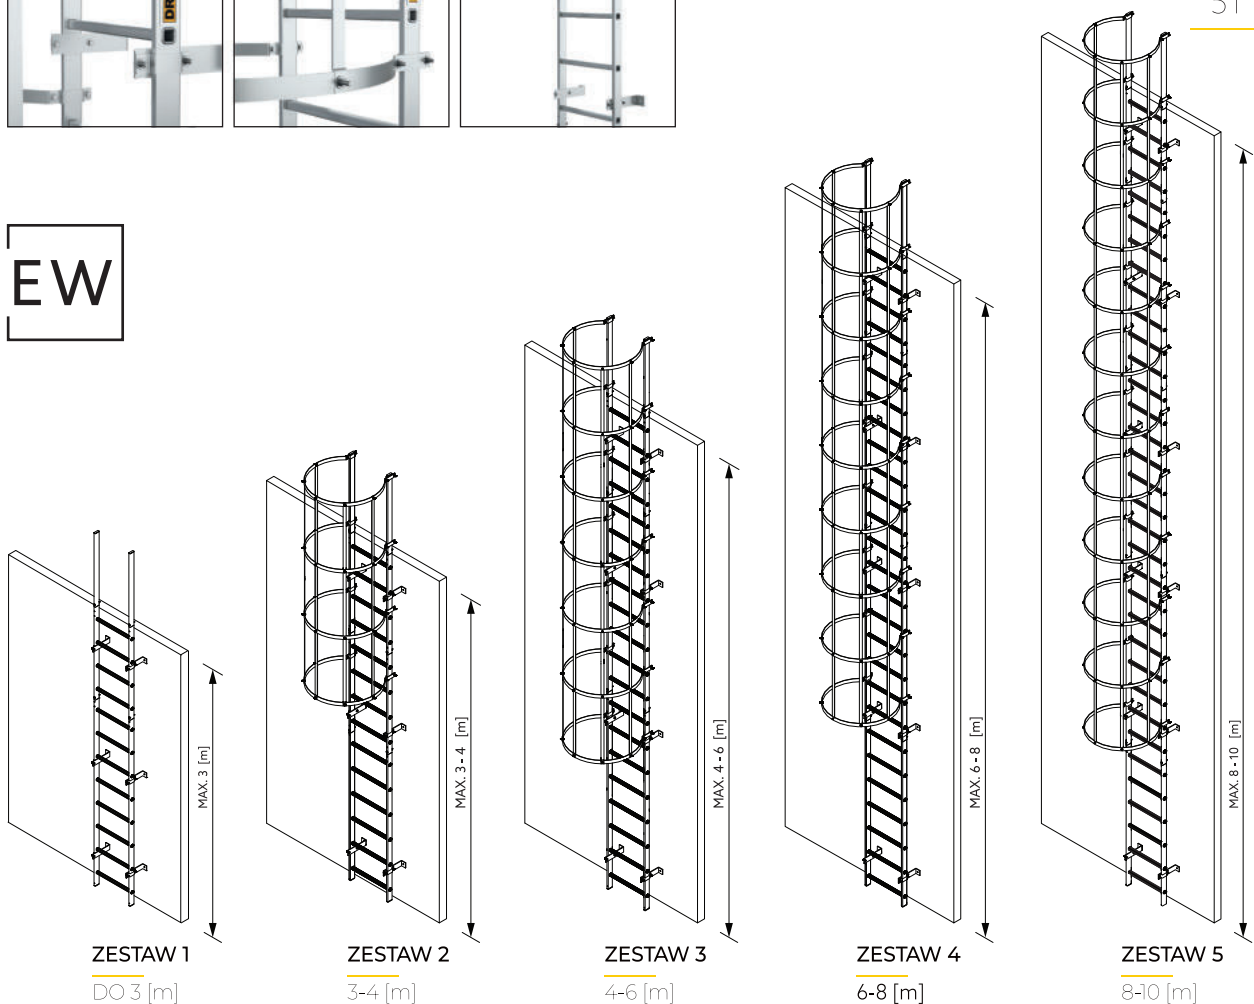

CUSTOM-MADE LADDERS

We design and manufacture individualized steel evacuation ladders tailored to the client's requirements and facility. Drabest brand evacuation ladders meet all necessary standards, possess safety and health certificates, ensuring safety and comfort during work. The vertical evacuation ladder is permanently mounted on buildings or machinery, and its primary function is to provide a fully secure means of accessing the structures to which it is attached

- 35 years of experience in the special construction industry!
- Customized construction tailored to your facility.
- On-time execution.
- Free quote - send inquiries to uslugi@drabest.pl.
- We also undertake individual steel constructions on request, such as bicycle racks or warehouse stairs.




PROFESSIONAL LADDERS MADE FOR OVER 30 YEARS!

PROFESSIONAL LADDERS MADE FOR OVER 30 YEARS!

Drabest was established on 15 December 1990 in Krakow by Piotr Paluch. Since then, it has been pursuing its mission to "provide people with products of the top quality for a reasonable price while ensuring safety at heights." The company has been developing dynamically on the domestic market and conquering new foreign markets for over 30 years. The successive expansion of the assortment offered to our customers and many years of experience allow us to meet the needs of every user. We currently manufacture various types of aluminium and steel structures for industrial and domestic use. Currently, the available products are: HOME - made for home use, PRO - for professional use, and the MAX line intended for professionals.

TOP QUALITY!

By choosing Drabest products you receive top-quality equipment for the work at heights, including scaffolding and ladders. Here you have the offer of one of the leading Polish companies in this industry. The extensive portfolio of the Drabest products is a perfect solution for a wide range of construction and renovation works, as well as for domestic use.

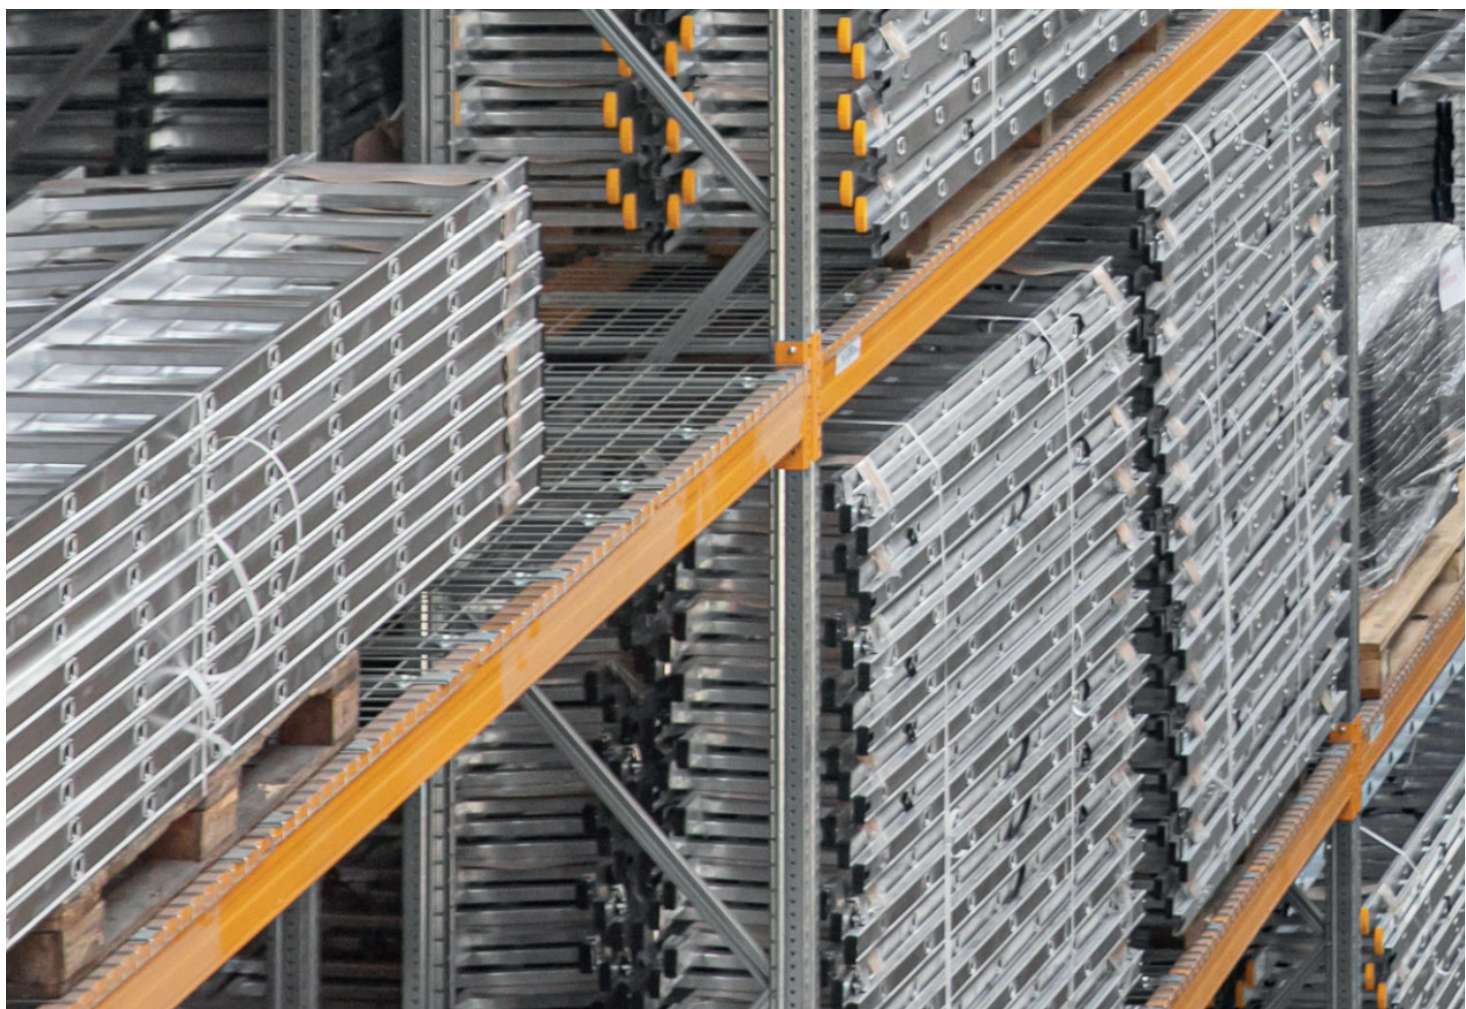



GRANDPA BOGDAN
RECOMMENDS SAFE
LADDERS WITH HANDRAILS

150KG

- ALUMINUM
WITH HANDRAILS
- FOR HOME USE
- 4 STEPS

LADDER - PRO



LOOK AT THE PAGE 28
MODEL: ALDP+P150KG